

ACRYLTEX ANAGLYFO (1mm, 1.5mm, 2mm)

ACRYLIC EMBOSSED DECORATIVE COATING ACRYLIC EMBOSSED

DEC/19 | DECORATIVE COATINGS

PROPERTIES

ACRYLTEX ANAGLYFO is a high-standard acrylic coating with excellent adhesive properties and high resistance to extreme weather conditions. It has high resistance to UV radiation and to humidity. It can be manufactured in a great range of colours with excellent colour stability. ACRYLTEX ANAGLYFO has an excellent workability and a powerful adhesion. It is suitable for both outdoor and indoor application on plaster, plasterboard, cement board etc without creating capillary cracks due to its high elasticity. It is used as a final decorative coating in thermal facade systems.

COVERAGE

1mm: 2.5 kg/m²


1.5mm: 3 kg/m²

2mm: 4 kg/m²

STORAGE

Up to 12 months in closed containers protected from the sun and low temperatures.

Attention: colour and general technical characteristics may vary slightly due to the substrate or by not following the manufacturer's directions for use. Technical specifications may vary slightly between product batches.

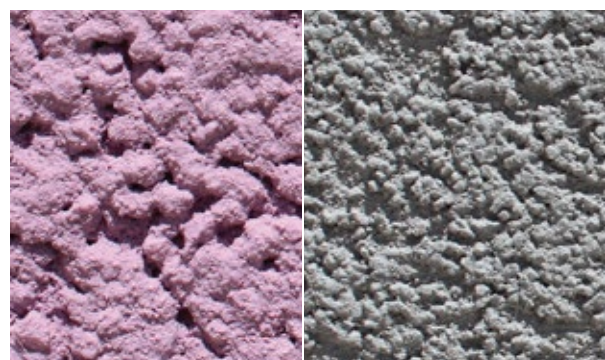

DIRECTIONS FOR USE

- Surfaces where ACRYLTEX ANAGLYFO will be applied must be free of dust and dirt.
- The surface must be applied with a coat of NEOCHROM's NEOSTRONG PRIMER diluted at 1:1 ratio with clean water. The primer needs 24 hours to dry.
- The primer is applied for the best adhesion of the coating.
- Afterwards, apply ACRYLTEX ANAGLYFO with a stainless-steel metal finishing trowel.
- Apply the product on the surface coated with primer and press with a plastic finishing trowel.

TECHNICAL SPECIFICATIONS

Colour:	Wide range of made to order colours
Specific weight	1,7kg/lit ± 0,05kg/lit
Temperature during application:	From +5°C to +35°C
Complete drying time:	After 48 hours
Mixture pH:	7±1
Adhesion strength:	: >0.3N/mm ²

PACKAGING

3 and 25kg plastic containers

